
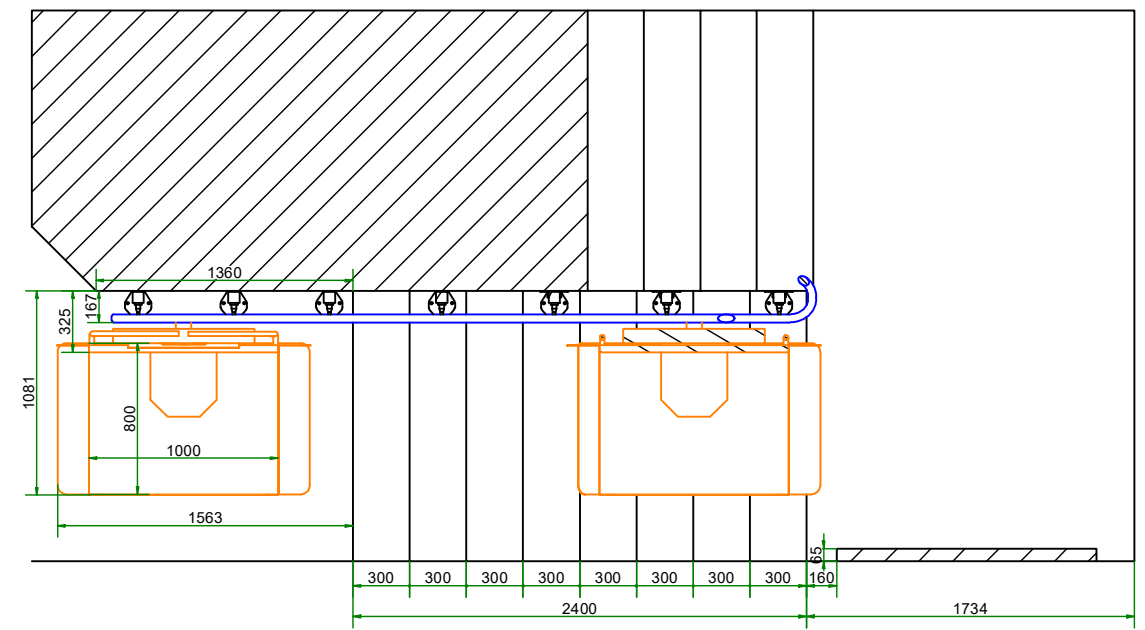


E-Supply for the charger by client
 230V 50Hz 11A
 6mm² potential equalisation inside installation
 16mm² Potential equalisation outside Installation

N-N (1 : 40)

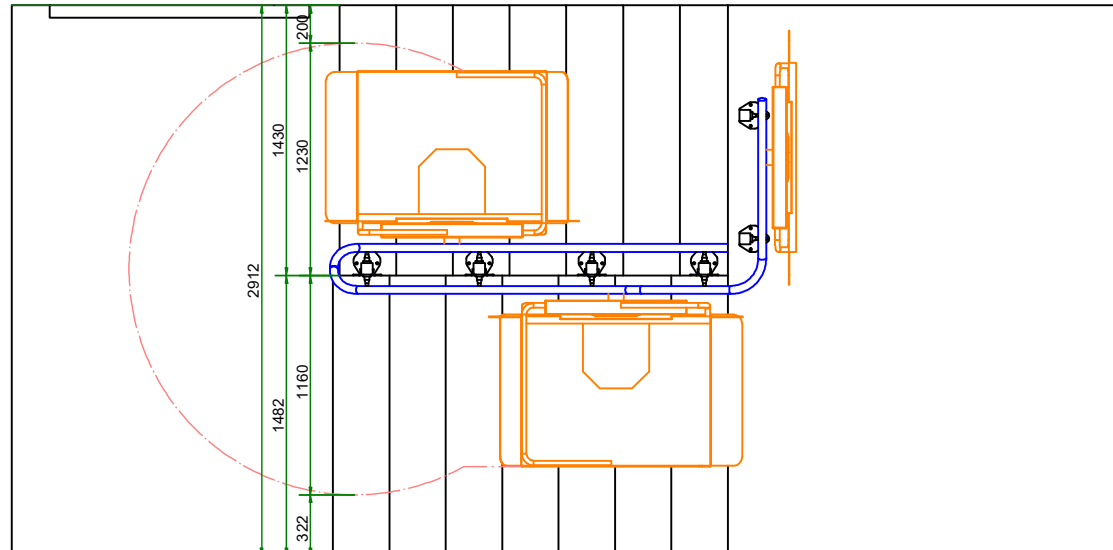

lift:
 GTL Edge battery operated;
 indoor installation;
 PCB controller;
 platform 800x1000;
 mountain-side ramp 170mm;
 valley-side ramp 170mm;
 300kg capacity;
 with folding seat;
 controlpanel G18 + on spiral cable;
 1 additional stop for landing; 1 additional stop for parking;
 coated RAL 7048;

remote controler:
 3 Pcs. Wireless wall switch with key switch - GFA18

Rail:
 8 m
 2 Pcs. Standard holder
 11 Pcs. holder + 20 mm

columns:
 5 Pcs. columns 60/60 - standard - RAL - hot-dip galvanized
 4 Pcs. columns 60/60 - extended to the ground (+ 5,5 running meters) - RAL 7048
 8 Pcs. Mounting bracket - 41 / 46 - RAL 7048

Stainless steel end caps at the end

The drafting was carried out based on the information which was provided to us. Ganser Maschinen GmbH assumes no responsibility for errors resulting from incorrect measurements!

I agree with the design of the construction in this way. Further I agree with the terms and conditions which are available under www.ganserlifte.at
 Date, signature from the customer/operator

Date, signature from the customer/operator

Maßstab: 1 : 40	Format: A3	Revision:	Datum: 12.07.2023	Gezeichnet: Nikola Hauenberger
Lift: Plattformtreppenlift GTLE				Adresse:
Firma: BV: GTLE Nyhyttan				
Auftr. Nr.: TUV 56302				

GANSER
 LIFTSYSTEME
www.ganserlifte.at

Ganser Maschinen GmbH
 Markt 26
 A-4171 St. Peter am Wimberg
 Tel.: +43 7282-8071, Fax: DW 22
 e-mail: info@ganserlifte.at

Copyright protection according to DIN ISO 16016
 Passing on and copying of this document, utilization and communication of its contents are prohibited, unless expressly authorized in writing. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent utility model or design.