

Product data sheet



Perform

AR9200



ARRONE overhead door closing device:

- Power size: 2 to 6 adjustable by spring tension
- Function: Closing speed, latching speed, backcheck
- Cover: Slide cover
- Maximum door width: 1,400 mm (Fig 1)
- Maximum door weight: 120 kg (Fig 1)
- Arm application: Fig 1 and Fig 6 & Fig 61 fixing positions
- Testing: **BS EN 1154:1997**; **BS EN 1634-1**. Assessed for use on 30, 60 and 120 minute timber fire doors.
 - Door mount pull (Fig 1), Frame mount push (Fig 61): 4 | 8 | 6/2 | 1* | 1 | 3
 - Door mount push (Fig 6): 4 | 8 | 3/5 | 1* | 1 | 3
- CE Marked: AD0162, UKCA Marked: UK-AD7684
- Certifire approved: CF295; CE DOP: HUK0029, UKCA DOP: HUK0029-UK

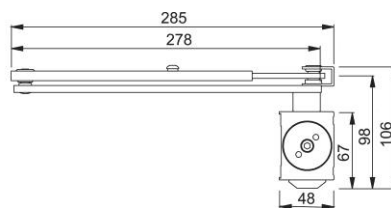

Article number	87109286
Product ref.	AR9200-SE
EAN-Code	5051358048270
Country of origin	Taiwan
CN-Code	83026000
Door type	wooden door
Maximum door width	1400 mm
Maximum door weight	120 kg
Arm Application	figure 1, 6 and 61
Mechanism function	Backcheck, spring adjustment, closing/latching speed
Mechanism type	Rack & pinion
Fixings	Timber door
Shape	Trim Plate
Power size	2 to 6
Opening Angle	max. 180° opening
Mechanism dimensions and fixing centres	256.5x60x48.2 mm; centres
Arm type	Scissor arm, detachable joint, flat form, adjustable
Finish	Silver Enamel
Finish of the cover	SE Silver Enamel
Arm finish	SE Silver Enamel
Range	ARRONE Range
Packing unit	4
Outer carton	50